



# novo

CONTROL DEVICES  
FOR AUTOMATIONS



# Novo

## Control systems for the automation

Novo is a line of accessories KINGgates designed to be integrated into any environment. The painted protective metal alloy casing makes these products antivandal, robust and secure.

Available in the key switch, receiver, radio, flashlight, step light, adjustable photocell, wireless radio keypad, wall or desk radio transmitter.



No screw  
at sight

Metal protection  
dust painted

## Wall or table radiotransmitter Rolling code 433.92 MHz

Novo Tx is the KINGgates 4 channel wireless transmitter. Designed to be wall mounted or used as a table top thanks to the anti-slip rubber included in the package.

Novo Tx is programmed as a normal transmitter and battery replacement is fast and easy.



### NOVO TX

Code	Description
Novo TX4	Wall radiotransmitter 4 channels 433.92 MHz
BAT-AAA	Spare batteries 2 pcs

### TECHNICAL DATA

Code	Frequency	Range	Coding	Power supply	Battery	Dimensions	Protection level
Novo TX4	433.92 MHz	100 m	Rolling code	2x1.5 V	2 x AAA	109x65x35 mm	IP 40



# Novo digy

## Numeric combination keypad Rolling code 433.92 MHz

Novo digy is the KINGgates numeric combination keypad via radio that can control up to 3 automation with a security code and also has a direct channel without numeric code combination.

Novo digy is programmed as a simple remote control and provides maximum security through the master code changed or deleted only by the installer.

Novo digy is the perfect combination of aesthetic design and installation flexibility.

Designed to be installed vertically with screen printing of the numbers on the front, you can instal Novo digy horizontally by applying a rigid label (included in the package rotating the numbers of 90°).

Like every product of the Novo line you can install the device on recess box 503.



### NOVO DIGY

Code	Description
Novo digy	Numeric radio keypad 4 channels 433.92 MHz
BAT-AAA	Spare batteries 2 pcs

### TECHNICAL DATA

Code	Frequency	Range	Coding	Power supply	Battery	Dimensions	Protection level
Novo digy	433.92 MHz	100 m	Rolling code	2x1.5 V	2 x AAA	109x65x35 mm	IP 54



## Key selector

Novo click is the KINGgates wall mounted key switch.

Novo click is built with miniaturised pre-wired microswitches and is fitted with an anti-vandal system with customised key.

Novo click is designed to combine an original appearance and ease of use. Unlike the usual key selectors which require time and special tools to connect the faston microswitch terminals, Novo click is fitted with a pre-wired terminal for quick connection to the control board

Shock resistant and designed for either vertical or horizontal installation, like all products in the Novo line it can be installed in the 503 recessed box.



### NOVO CLICK

Code	Description
Novo click	Key selector with pre-wired connectors

### TECHNICAL DATA

Code	Dimensions	Protection level
Novo click	104x60x30 mm	IP 54



# Novo ph

## Rotating photocells

Novo ph 180 is the KINGgates photocell with protective metal case.

Novo ph 180 is the infrared photocell with great performance with a range in open space of 30 meters and up to 15 meters in critical weather conditions. It is adjustable in 3 positions (0°-90°-180°), easy to install in all environments. Thanks to metallic alloy case Novo ph is a robust and shock-resistant photocell, integrates with all the Novo accessory line and ensures the security of all automated paths through a sober and original way. The size and the metal case protection of the Novo accessories make the photocell Novo ph 180 a solid and professional product.

Like all the Novo product line you can install Novo light with the recess box 503.



### NOVO PH

Code	Description
NOVO ph 180	Pair of rotating photocells (0°-90°-180°) with metal protection

### TECHNICAL DATA

Code	Supply	Range	Consumption	Working temperature	Dimensions	Protection level
NOVO ph 180	12 ÷ 24 Vac-Vdc	30 m Standard	50 mA (TX+RX)	-20 ÷ +55 (°C)	109x65x35 mm	IP 54



## Wall mounted flashing light

Novo light is the KINGgates wall flashing light.

With the programmable functions in the KINGgates control units, Novo light can be powered in a “oscillating” or continuously so that it can be used as a flashing light or courtesy light. The Led technology in the version Novo LT Led guarantees intensity, low consumption and long life. Can be installed vertically or horizontally, Novo light is ideal flashing light for garage door and residential gate use. The compact size and the metal case protection make this original product blend into all environments.

Like all the Novo product line you can install Novo light with the recess box 503. Practical and original is the direct installation on the overhead door frame. The metal cover makes Novo light a shock resistant product, while the integrated aerial avoids vandalism and enhances the radio transmitter range.



### NOVO LIGHT

Code	Description
Novo LT 24 plus	24 V lamp, 10 W with integrated aerial
Novo Led Plus	24 V lamp, LED technology with integrated aerial

### TECHNICAL DATA

Code	Built-in aerial	Lamp	Supply	Dimensions	Protection level
Novo light	433.92 MHz	E10 10 W (LT 24 version)	24 Vac	109x65x35 mm	IP 54



# THE KING SPECIALIST




## **KINGspecialist app for installers**

The KINGspecialist app allows you to complete all installation setup phases directly from your smart phone or tablet.

### **Thanks to the wifi module,**

which can be coupled to STARG8 central units, every professional can now manage all the functions offered by the KING Smart Traditional electronic device simply and intuitively.

The App also introduces new functions, such as scheduling of periodical system maintenance, central unit check-ups and remote control management.

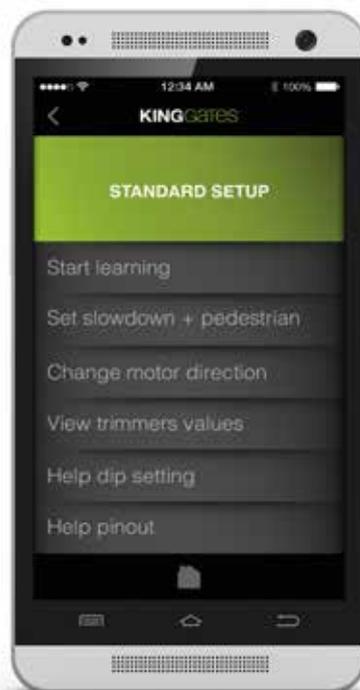

## **KINGgates relies on a network of expert professional installers.**

KINGspecialist is a programme available only to installers: KINGgates quality in the form of a service. Installer-friendly innovations and continuous updates to keep growing together.



**KINGgates**  
[www.king-gates.com](http://www.king-gates.com)

### **KING GATES srl**

Via A. Malignani 42  
33077 Sacile (PN) Italy  
Ph. +39 0434 737082  
Fax +39 0434 786031  
[info@king-gates.com](mailto:info@king-gates.com)